843-1 Drop Bolt.

The 843 door deadbolt's compact design and sophisticated accesories enable it to be fitted in a variety of locations. It thus can offer optimum security as an additional door locking system in both commercial and private buildings.

Overvier of Advantages

- Automatic unlocking for 8 seconds via integrated control
- Integrated door and locking monitoring contacts
- Suitable for short and permanent release
- In order for the deadbolt to function, a striking plate with magnet to detect the door status is a must

Technical features

- Input operating voltaje: 12/24V -10%/+15%
- Bolt throw: 14mm
- Dead bolt diameter: 12,7mm
- Shear strength: 10.000N
- Model with cylinder hole for mechanical unlocking ref. 843-ZY
- Starting current: 1050mA at 12VDC, 900mA at 24VDC
- Latching current: 210mA at 12VDC, 80mA at 24VDC

843-1

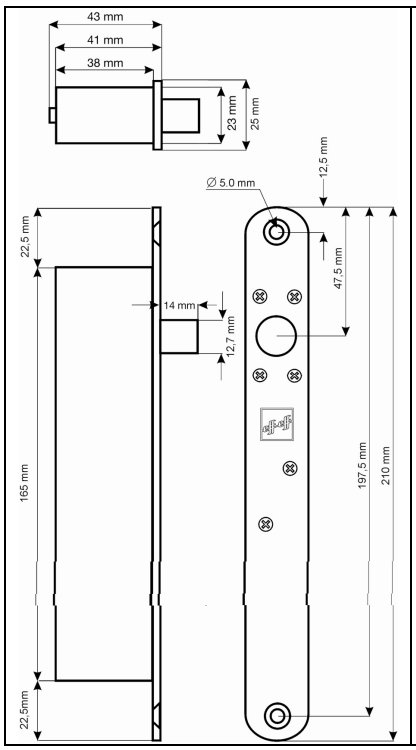

843ZY-1

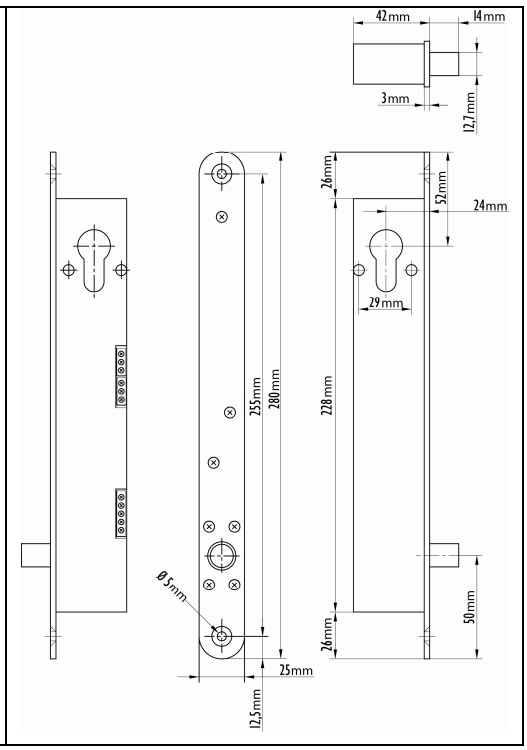

Klesco – C/Agregació, 43 – 08041 Barcelona – tel. +34 93 450 48 00 – Fax +34 93 456 72 83 – klesco@klesco.com - www.klesco.com

Product Information

Accesories

Reference		Reference	
843-2 Short striking plate with magnet for door bolt 843-1		**843-3** Long striking plate with magnet for door bolt 843-1	
843 ZY-3 Striking plate with magnet for door bolt 843ZY-1		**843-4** Masonry housing for door bolt 843-1 in stainless steel	
843 ZY-4-1 Masonry housing for door bolt 843ZY-1 with key hole in stainless steel		**843 ZY-4-2** Mansory housing for striking plate 843ZY-3 in stainless steel	