MAGNETIC CONTACTS SERIES

Surface mount magnetic contacts.

These magnetic contacts are suitable for opening detection for doors, windows and other lock state elements. All these magnetics contact are supplied with an extensive range of installation accessories as standard, which include height adjusting discs, screws, etc… ensure that the installation process is quick and simple.

Reference	Cable length	Clear response distance	Max. switching voltage / current	Dimensions	Contact type
100 10 02 A	2 m	Max.18mm	200V-0,5A CC	38x10x10mm	NO
100 10 17 A	2 m	Max. 28mm	200V-0,5A CC	55x10x10mm	NO
100 10 22 C	2 m	Max. 23mm	200V-0,5A CC	55x10x10mm	NO/NC
100 10 17 A + M1090	2 m	Max. 28mm	200V-0,5A CC	68x32x20mm	NO
100 11 06 A/A	2 m	Max. 23mm	200V-0,5A CC	55x10x10mm	2 x NO

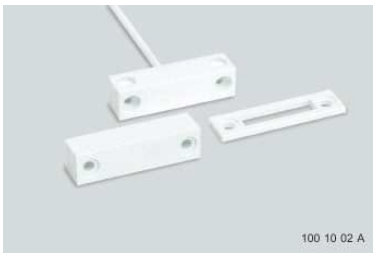

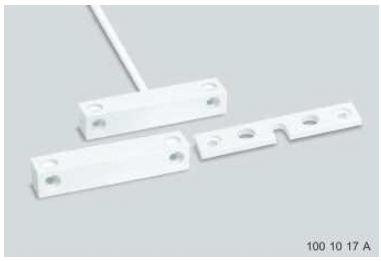

Recess mount magnetic contacts.

Magnetic contacts with combined opening and lock state detection for windows and doors that provides maximum security.

Reference	Cable length	Max. switching voltage / current	Dimensions	Contact type
100 10 35 A	2 m	100V-0,5A DC	30 x Ø 6mm	NO
100 10 49 A + M1142	2 m	100V-0,5A DC	20 x Ø20,5mm	NO

Seawater proof shutter contacts

Magnetic contact extremely robust, saltwater-resistant with aluminium housing. Shutter contacts can be used for monitoring shutters, sliding doors and garage doors.

Reference	Cable length	Clear response distance	Max. switching voltage / current	Dimensions	Contact type
100 31 17 A	2 m	Max. 50mm	200V-0,5A DC	230x45x13mm	NO

Product Information